

07-03 20


A

JC836 U.S. PTO  
06/30/00

PATENT APPLICATION  
Attorney's Do. No. 2705-109

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

JC836 U.S. PTO  
09/608276  
06/30/00

EXPRESS MAIL	MAILING LABEL NO. EL432978023US DATE OF DEPOSIT: JUNE 30, 2000
I HEREBY CERTIFY THAT THIS PAPER AND ENCLOSURES AND/OR FEE ARE BEING DEPOSITED WITH THE UNITED STATES POSTAL SERVICE "EXPRESS MAIL POST OFFICE TO ADDRESSEE" SERVICE UNDER 37 CFR 1.10 ON THE DATE INDICATED ABOVE AND IS ADDRESSED TO: BOX PATENT APPLICATION, ASSISTANT COMMISSIONER FOR PATENTS, WASHINGTON D.C. 20231.	
MELISSA SMITH (SENDER'S PRINTED NAME)	 (SIGNATURE)

Box PATENT APPLICATION  
Assistant Commissioner for Patents  
Washington, DC 20231

Enclosed for filing is a patent application under 37 CFR 1.53(b).

Applicants: Gene Ma and Henry Wang

Title: ITU H450.1-BASED ITU H.323 SCP METHOD AND APPARATUS

Enclosures:


1. Specification (pages 1-10); claims (pages 11-13); abstract (page 14)
2. SIX sheets of formal drawings
3. Combined Declaration and Power of Attorney (unsigned)
4. Return postcard

CLAIMS AS FILED				
For	Number Filed	Number Extra	Rate	Basic Fee \$690.00
Total Claims	10-20	0	x \$18.00 =	
Independent Claims	4-3	1	x \$78.00 =	\$78.00
Multiple Dependent Claim Fee			x \$260.00 =	
TOTAL FILING FEE				\$768.00

Customer No. 20575

Respectfully submitted,

MARGER JOHNSON & McCOLLOM, P.C.

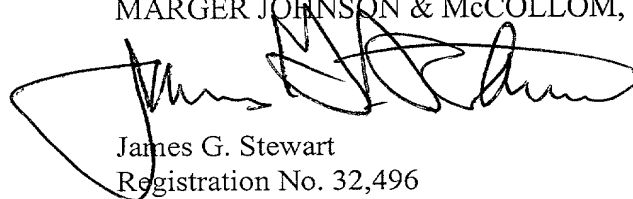

James G. Stewart  
Registration No. 32,496

MARGER JOHNSON & McCOLLOM, P.C.  
1030 SW Morrison Street  
Portland, OR 97205  
(503) 222-3613

# ITU H450.1-BASED ITU H.323 SCP METHOD AND APPARATUS

## BACKGROUND OF THE INVENTION

The present invention concerns support of advanced intelligent network (AIN) services in voice frame networks using protocols such as voice over Internet protocol (VoIP) based upon the ITU-T 450.1 standard, which is the supplementary services protocol framework within ITU-T H.323 networks.

AIN is the Bellcore term for such intelligent network services, and Intelligent Network (IN) is the ITU-T term. Both terms convey the idea of a network that provides a platform to deploy user services in a fast and efficient manner. Since they are very similar in the services they provide and the network architectures, the term AIN is used through this patent application. However, the present invention can be used for both AIN and IN without any modification.

A fundamental aspect of AIN is the ability to support the quick creation of services for the end customer. The AIN uses technology of Signaling System number 7 (SS7) and adds its functionality at the application layer to achieve goals like:

- 1) Provide timely creation of new services for the customer;
- 2) Support a wide range of services;
- 3) Support efficient maintenance of the AIN system;
- 4) Enforce a seamless environment between vendors' systems; and
- 5) Automate services that entail operator intervention.

One of the most important AIN network elements to achieve these goals is the service control point (SCP). It contains Service Logic Programs (SLPs) and associated data to provide AIN services, such as 800 numbers, credit verification, and so on. Sometimes, the services provide by the SCP are also called supplementary services in order to differentiate the basic call services provided by the switch services point or SSP, another important AIN network element. The SSP is responsible for basic call processing operations and the switching operations to move the signaling traffic through the network. The SSP uses the signaling traffic to set up a connection. The basic call services include call origination authorization, dialed address information collection and analysis, and so on.

A related AIN application is the provision in a voice frame network of an interface between an intelligent peripheral such as an interactive voice response unit and a gatekeeper. Such an interface based on ITU H.323 and H.450 is described in co-

pending U.S. Patent Application Serial No. \_\_\_\_\_ entitled VOICE FRAME  
NETWORK GATEKEEPER-TO-INTELLIGENT PERIPHERAL INTERFACE  
METHOD AND APPARATUS, which co-pending application was filed on the filing  
date of the present application. The co-pending patent application is assigned in  
5 common with the present application to Cisco Technology, Inc. and its disclosure is  
incorporated herein by this reference.

Those of skill in the art will appreciate that the referenced ITU and related  
standards are well known, evolving standards. Accordingly, reference herein to these  
standards will be understood to mean the standards as they existed at the time of the  
10 earliest effective filing date of the present application, and as they have evolved to date,  
and as they continue to evolve over the term of any patent that issues herefrom.  
Applicants note that an instructive earlier version of the ITU H.450.1 standard is  
described in *Generic functional protocol for the support of supplementary services in*  
*H.323*, date unknown, and that various ones of the ITU-T standards are described in *Call*  
15 *Signaling Protocols and Media Stream Packetization for Packet Based Multimedia*  
*Communications Systems*, February 1998 and *Call Transfer Supplementary Service for*  
*H.323I*, September 1997.

Fig. 1 shows the conventional AIN architecture wherein one or more SSPs 10a,  
10b are connected via a generic interface 12 to a SCP 14 having a database 16 connected  
20 therewith. SCP 14 will be understood by those of skill in the art to provide one or more  
supplementary services via so-called service logic programs (SLPs) and needed control  
data for implementing desired SCP functions, as are known. SSPs 10a, 10b will be  
understood by those of skill in the art to provide call switching and routing functions as  
well as basic call services, as are also known.

25 Instead of tailored messages for a specific service, the AIN architecture uses a  
common set of standardized messages for a variety of services. Thus, the switch call  
processing and the SCP database processing support a common interface to, for example  
two different SSPs, as shown in Fig. 2. Fig. 2 is similar to Fig. 1 and further shows the  
routing via dashed lines of various message components among SSPs 10, 10b, SCP 14, a  
30 calling party 18 and a called party 20.

A typical AIN session proceeds as follows (wherein the numbers on the dashed  
lines in Fig. 2 correspond with the numbered steps below):

- 1) A calling party dials in to network.

2) SSP makes query to SCP on a common interface, such as SS7 (in 800 number service, SSP sends query to SCP to get routable address information).

3) SCP returns the replay that contains the requested information (in 800 services, SCP returns the SSP with a number, such as 949-823-1146, and the SSP uses its call processing to route the call).

4) SSP associated with the calling party sets up the connection to the SSP associated with a called party.

5) The terminating SSP sets up the connection to the called party.

As mentioned above, both Bellcore AIN and ITU-T IN services are deployed by SS7 networks. More precisely, the SS7 TCAP (Transaction Capabilities Applications Part) is the protocol that carries the common set of standardized messages of AIN services between a SCP and one or more SSPs.

Fig. 3 illustrates the conventional protocol architecture for TCAP-based SCP by which the TCAP transaction and component and processing as layers over the SS7 network provides a TCAP message handling interface between the AIN 0.1/0.2 protocol and message set and application processes and the SS7 network and SCCP/MTP protocol. Those of skill in the art will appreciate that TCAP functions are grouped into two portions: a transaction portion and a component portion.

The transaction portion identifies whether the TCAP transaction is expected to include single or multiple messages and provides an application-level associated over which components are exchanged. Also, the transaction portion provides a way to indicate whether its content is the only message in this exchange or the portion of the message in an extended exchange of information (i.e., first, middle, last). This is necessary in SS7 networks since a SS7 message can not exceed 272 bytes. If a SS7 message for an AIN service contains more than 272 bytes, it will be broken into more than one piece, with each piece being fitted into one SS7 message.

An understanding of the AIN architecture and services leads to the conclusion that the SCP functionality is independent of the basic call services provided by the SSP, as long as both SCP and SSP access through a common interface. In other words, the supplementary services provided by SCP can be used to serve for other network architectures, such as ITU H.323 networks to provide same voice services as SSPs in a public switched telephone network (PSTN) context. This is the inspiration for an invention that provides AIN services in ITU H.323 networks by using a SCP, a SCP

based on ITU H.450.1, the supplementary services protocol framework in ITU H.323 networks.

### SUMMARY OF THE INVENTION

5 A method for providing advanced intelligent network (AIN) supplementary services between an ITU H.323 endpoint and a service control point (SCP) having service logic programs (SLPs) and transaction capabilities applications part (TCAP) protocol support is described. The method preferably includes providing an ITU H.450 interface in the SCP, the ITU H.450 interface being capable of communicating with the  
10 ITU H.323 endpoint, and utilizing an ITU H.225 FACILITY message and an ITU H.450 application protocol data unit (APDU) to carry one or more of call-related information, operation codes and AIN messages between the ITU H.323 endpoint and the SCP. In a case in which the AIN supplementary services are not related to an existing ITU H.323 call, the ITU H.225 FACILITY message is empty. Alternatively, in a case in which the  
15 AIN supplementary services are related to an existing ITU H.323 call, the ITU H.225 FACILITY message is a user-to-user information element (UUIE) including one or more of a setup-UUIE, a connect-UUIE and a releaseComplete-UUIE.

The invented apparatus for supporting advanced intelligent network (AIN) supplementary services in a voice frame network preferably includes an ITU H.450.1  
20 interface to a service control point (SCP), the SCP having also a transaction capabilities applications part (TCAP) interface to the public switched telephone network (PSTN), the SCP providing AIN supplementary services in a network environment compatible with an ITU H.323 endpoint, and an ITU H.323 endpoint interface for coupling to the ITU H.450 interface over the voice frame network, the ITU H.323 endpoint interface  
25 supporting an ITU H.450-based communications protocol.

### BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a block diagram showing a conventional advanced intelligent network (AIN) architecture.

30 Fig. 2 is a block diagram showing how call and supplemental services support a calling and called party in the conventional AIN architecture of Fig. 1.

Fig. 3 is a block diagram showing the conventional layered protocol architecture of the transaction capabilities applications part (TCAP) and AIN services supported by the service control point (SCP).

Fig. 4 is a block diagram illustrating an ITU H.323 network having gatekeepers and endpoints and a PSTN having SCPs and SSPs, the network and the PSTN being linked together via gateways.

Fig. 5 is a block diagram illustrating the layered protocol architecture of an ITU H.450.1-based ITU H.323 SCP.

Fig. 6 is a block diagram illustrating an ITU H.323 network architecture in accordance with a preferred embodiment of the invention.

#### DETAILED DESCRIPTION OF THE INVENTION

Briefly summarizing the applicable international standards, ITU H.323 has been used as a baseline standard that references other ITU-T standards:

- H.225.0:
  - RAS (Registration, Admission, and Status) protocol uses H.225 message to perform registration, admissions, bandwidth changes, status, and disengage procedures between endpoints and a Gatekeeper (GK).
  - The call signaling function uses H.225 call signaling to establish the connection between two H.323 endpoints.
  - RTP/RTCP (Real-Time Transfer Protocol/Real-Time Control Protocol) are used for media and control message format.
- H.345: describes the messages and procedures used for opening and closing logical channels for audio, video, and data; capability exchange; mode requests; control; and indications.
- H.450.x: in conjunction with the call signaling protocol defined in H.225.0, H.450.1 provides the H.323 entities a generic functional protocol for the control of supplementary services. This is entirely independent of any existing H.323 calls. The supplementary services are designed either in other H.450.x (x>1) or by a manufacturer.

There is no size limitation on a H.323 message. Therefore, the Transaction Portion is not necessary when a SCP is used in H.323 networks. Since message size limitation is absent in H.323 networks, only four APDUs (returnResultNotLast OPDU not being required) are sufficient for a H.323 SCP.

Fig. 4 shows an example of a H.323 network for voice frame network such as VoIP services. Fig. 4 illustrates how a PSTN 22 and a network 24 such as the Internet

are made to communicate via one more more gateways (GWs) 26a, 26b. PSTN 22 may be seen to provide access to a SCP 14 and an SSP 10. Network 24 may be seen to provide access to a gatekeeper (GK) 28 and one or more ITU H.323 endpoints (EPs) 30, 32. Notably, the illustrated architecture provides no access to AIN services provided by SCP 14 and SSP 10 to a ITU H.323 gatekeeper 28, endpoint 30, 32 or other ITU H.323 entity. This is the problem addressed by the present invention.

In the current H.323 network architectures, basic call services (via H.225 call signaling protocol) and supplementary services (via H.450.x) are controlled by the H.323 endpoints (e.g., gateway (GW)), and gatekeeper (GK) as an option. This situation is very similar to the early telephone network, in which the switches contain not only basic call service program and switching capabilities but also control data and supplementary service programs. In that early telephony environment, it was hard to make timely release to software; it is even harder to build new services. AIN changed the situation by introducing SCP and removing the supplementary service programs and control data from switches to a centralized SCP (see Fig. 1).

From Fig. 4 it may be appreciated by those of skill in the art that to provide the same AIN services to a H.323 network, it is necessary to provide an interface by which H.323 gateway or gatekeeper or other H.323 endpoints can access the SCP. Two methods of providing such access seem plausible:

1. The SS7 TCAP is used to exchange AIN messages between one or more SSPs and a SCP. Accordingly, one method would be to add SS7 TCAP to related H.323 entities so that they can access a SCP in the conventional way.
2. Instead of using SS7 TCAP, H.450.1 might be used to carry AIN messages between H.323 entities and SCP.

Method 1 would require two network interfaces, H.323 and SS7 TCAP, for each H.323 entity that requires access to a SCP. From a network management point of view, this approach would require the H.323 network operator to manage an additional expensive SS7 network.

Method 2 would provide a much more efficient and economical way to let a H.323 entity to access SCP. Since H.450.1 is part of the H.323 protocol (which will be supported by most H.323 entities), the AIN call model could be added to the H.323 entities and the same H.323 network could be used to access a SCP. With the SCP as a central feature in such an AIN supplemental services system, adding a H.450.1 protocol



to it is more straightforward and less expensive than adding SS7 TCAP to many H.323 entities.

The invented H.450.1-based SCP will now be described, as will the problems associated with the use of H.450.1 that the present invention solves.

5           ITU-T H.450.1 provides the H.323 entities a generic functional protocol for the control of supplementary services, but leaves the specification of such function and control to the user. Two types of functionality are required in the AIN-over-VoIP context.

1. For supplementary services that are related to existing H.323 calls or entities that  
10       participate in the call, e.g. Call Transfer defined in H.450.2, a H.450 APDU can be carried by H.225.0 call signaling message through the existing call signaling channels.
2. For supplementary services that are entirely independent of any H.323 existing calls,  
15       e.g. a database query from a H.323 entity to a SCP, the SCP simply provides requested information to the H.323 entity and is not a participant of the existing call. In H.225.0, this is achieved by using an empty H.323 user-to-user information element (UUIE) FACILITY message with the H.450 application protocol data unit (APDU).

20           For type 1 supplementary services, the H.225 call signaling message contains a non-empty H.323-UUIE and a H.450.1 APDU. The non-empty H.323-UUIE carries existing call related information, and the H.450 APDU contains an application code for a specific supplementary service. The non-empty H.323 UUIE can be a setup-UUIE, a connect-UUIE, a releaseComplete-UUIE, etc. Any other non-empty H.323 function may be provided, within the spirit and scope of the invention.

25           Since the type 2 services are not related to existing H.323 calls, the H.323-UUIE in H.225 call signaling message is set empty. Under H.323, only the H.225 FACILITY message can carry an empty H.323-UUIE. Thus, in this specific FACILITY message, the H.450.1 APDU is used to carry application messages, such as an AIN message.

30           Unlike SS7 TCAP, H.450.1 is modeled after Remote Operations Service Element (ROSE) and defines a total of four APDUs (which are referred to in ROSE as operation protocol data unit (OPDU). The H.450.1 APDUs preferably include

- 1) invoke APDU;
- 2) returnResultLast APDU;
- 3) returnError APDU; and

4) reject APDU.

As mentioned above, the returnResultNotLast OPDU defined in TCAP is used to overcome the size limitation for a SS7 message. It permits a result to be segmented if its size exceeds the 272-byte limitation. However, there is virtually no size limitation for a H.450.1 APDU and a H.323 message. The returnResultNotLast OPDU is not needed for H.450.1 to carry an AIN message. Therefore, H.450.1 can be used in accordance with the invention to provide the functions of the conventional TCAP Component Portion (refer to Fig. 3).

ITU H.450.1 provides no counterpart to the Transaction Portion in SS7 TCAP. However, most of the Transaction Portion functionality is not required for H.450.1-based SCP.

Accordingly, a H.450.1-based SCP can be defined as follows. A H.450.1-based SCP contains Service Logic Programs (SLPs) and associated data to provide AIN services, such as 800 numbers, credit verification, and so on. It uses a specific H.225 empty FACILITY message plus H.450.1 protocol to carry AIN messages for exchanging information with other H.323 entities.

Fig. 5 shows the protocol architecture for H.450.1-based SCP by which the H.450.1 APDU as a layer over the H.323 protocol provides a H.225 message handling interface between the existing AIN 0.1/0.2 protocol and message set and application processes and the H.323 network and TCP/IP protocol. Those of skill in the art will appreciate by contrasting Fig. 5 with Fig. 3 that H.450.1 provides no transaction sub-layer as does TCAP. Only the Invoke ID operation is available to maintain a conversation between a H.323 SCP and a GK. The transaction ends when the OPERATION Return Result or Return Error or Reject is received. However, most current AIN services, e.g. 800 and LNP, use only a single query-response transaction between an SSP and the SCP. Accordingly, this seeming limitation of H.450.1--whereby it provides no transaction sub-layer or multiple component capability--is overcome in accordance with the invention.

Fig. 6 shows a preferred embodiment of the H.450.1-based SCP invention. For some VoIP service providers, the H.450.1-only based SCP made in accordance with the invention can be installed in their H.323 networks if they do not own a conventional SCP. A traditional phone service provider, e.g. AT&T™ or MCI™, can add an H.450.1 interface to its existing SCP so that AIN services can be provided homogeneously to its

PSTN and H.323 network customers. Moreover, existing TCAP-based SCP AIN services can be ported to the H.323 SCP without major modification. Thus, the invention enables Telco service providers to sell (or port) existing AIN services to Internet telephony service providers (ITSPs) so that the ITSPs need not develop the same AIN service programs in the VoIP environment.

This is illustrated in Fig. 6, which is similar to Figs. 1 and 4. In Fig. 6, identical elements from Fig. 4 are identically reference designated. The important difference in Fig. 6 is the provision in accordance with the invention of an interface module to the existing SCP to enable the invented SCP 14' to interface not only via TCAP on PSTN 22 (via TCAP interface 34) but also via H.450.1 on voice frame network 24 (via H.450.1 interface 36). SCP 14' will be understood to be identical with conventional SCP 14 but for the addition of the H.450.1 interface and the protocols defined herein for communicating supplemental services information between SCP 14' and a H.323 gatekeeper, endpoint or other entity.

Referring again briefly to Fig. 5, ITU H.450.1 interface 36 may be seen preferably to include an AIN application processes program layer 36a configured to support AIN supplementary services; an AIN protocol and message set program layer 36b operatively coupled with said application processes program layer; a H.450.1 APDU program layer 36c operatively coupled with said protocol and message set program layer; a H.323 protocol program layer 36d operatively coupled with said H.450.1 APDU program layer; and a H.323 network program layer 36e operatively coupled with said H.323 protocol program layer, said H.323 network program layer being configured for TCP/IP connection with the voice frame network. Interface 36, as configured in accordance with a preferred embodiment of the invention is implemented in software having the various layers described above, although alternative configurations are contemplated, and are within the spirit and scope of the invention.

Those of skill in the art will appreciate that the functions and operations described herein are illustrative only and that the invention is not so limited. Those of skill in the art also will appreciate that the H.450.1-based SCP functionality made possible by the invented method and apparatus is transparent to other voice frame network devices including other H.323-compatible devices, and to other TCAP devices. This ensures its broad compatibility in network design with the installed base of SSPs, SCPs, the PSTN, AIN and H.323 or other voice frame network equipment.

Finally, those of skill in the art will appreciate that the invented method and apparatus described and illustrated herein may be implemented in software, firmware or hardware, or any suitable combination thereof. Preferably, the method and apparatus are implemented in software, for purposes of low cost and flexibility. Thus, those of skill in  
5 the art will appreciate that the method and apparatus of the invention may be implemented by a computer or microprocessor process in which instructions are executed, the instructions being stored for execution on a computer-readable medium and being executed by any suitable instruction processor. Alternative embodiments are contemplated, however, and are within the spirit and scope of the invention.

10 Having illustrated and described the principles of my invention in a preferred embodiment thereof, it should be readily apparent to those skilled in the art that the invention can be modified in arrangement and detail without departing from such principles. I claim all modifications coming within the spirit and scope of the accompanying claims.

## CLAIMS

1. A method for providing advanced intelligent network (AIN) supplementary services between an ITU H.323 endpoint and a service control point (SCP) having service logic programs (SLPs) and transaction capabilities applications part (TCAP) protocol support, the method comprising:

providing an ITU H.450 interface in the SCP, the ITU H.450 interface being capable of communicating with the ITU H.323 endpoint, and

utilizing an ITU H.225 FACILITY message and an ITU H.450 application protocol data unit (APDU) to carry one or more of call-related information, operation codes and AIN messages between the ITU H.323 endpoint and the SCP.

2. The method of claim 1 wherein, in a case in which the AIN supplementary services are not related to an existing ITU H.323 call, the ITU H.225 FACILITY message is empty.

3. The method claim 1 wherein, in a case in which the AIN supplementary services are related to an existing ITU H.323 call, the ITU H.225 FACILITY message is a user-to-user information element (UUIE) including one or more of a setup-UUIE, a connect-UUIE and a releaseComplete-UUIE.

4. Apparatus for supporting advanced intelligent network (AIN) supplementary services in a voice frame network, the apparatus comprising:  
an ITU H.450.1 interface to a service control point (SCP), the SCP having also a transaction capabilities applications part (TCAP) interface to the public switched telephone network (PSTN), the SCP providing AIN supplementary services in a network environment compatible with an ITU H.323 endpoint, and

an ITU H.323 endpoint interface for coupling to the ITU H.450 interface over the voice frame network, the ITU H.323 endpoint interface supporting an ITU H.450-based communications protocol.

5. The apparatus of claim 4 wherein said ITU H.450.1 interface takes the form of a computer-readable medium containing a program, the program comprising:

an AIN application processes program layer configured to support AIN supplementary services;

5 an AIN protocol and message set program layer operatively coupled with said application processes program layer;

a H.450.1 APDU program layer operatively coupled with said protocol and message set program layer;

10 a H.323 protocol program layer operatively coupled with said H.450.1 APDU program layer; and

a H.323 network program layer operatively coupled with said H.323 protocol program layer, said H.323 network program layer being configured for TCP/IP connection with the voice frame network.

15 6. Apparatus in the form of a computer-readable medium containing a program, the apparatus supporting advanced intelligent network (AIN) supplementary services in a voice frame network, the program comprising:

an ITU H.450.1 interface operatively coupled with a centralized service control point (SCP) having a transaction capabilities applications part (TCAP) interface to a public switched telephone network (PSTN), said ITU H.450.1 interface also  
20 operatively coupled with a voice frame network, said ITU H.450.1 interface including:

an AIN application processes program layer configured to support AIN supplementary services;

25 an AIN protocol and message set program layer operatively coupled with said application processes program layer;

a H.450.1 APDU program layer operatively coupled with said protocol and message set program layer;

30 a H.323 protocol program layer operatively coupled with said H.450.1 APDU program layer; and

a H.323 network program layer operatively coupled with said H.323 protocol program layer, said H.323 network program layer being configured for TCP/IP connection with the voice frame network.

7. A computer-readable medium containing a program for providing advanced intelligent network (AIN) supplementary services between an ITU H.323 endpoint and a service control point (SCP), the program comprising:

5 instructions for communicating with an ITU H.323 endpoint over a voice frame network;  
instructions for communicating with an AIN supplementary services application program layer; and  
instructions for implementing an ITU H.450.1 protocol using one or more  
10 application protocol data units (APDUs) to carry one or more of call-related information, operation codes and AIN messages between the ITU H.323 endpoint and the SCP.

8. The computer-readable medium in accordance with claim 7 which further  
15 comprises:

instructions for utilizing an ITU H.225 FACILITY message and the one or more APDUs to carry the one or more of call-related information, operation codes and AIN messages between the ITU H.323 endpoint and the SCP.

20 9. The computer-readable medium in accordance with claim 8 wherein, in a case in which the AIN supplementary services are not related to an existing ITU H.323 call, the ITU H.225 FACILITY message is empty.

10. The computer-readable medium in accordance with claim 8 wherein, in a  
25 case in which the AIN supplementary services are related to an existing ITU H.223 call, the ITU H.225 FACILITY message is an ITU H.323-UUIE including one or more of a setup-UUIE, a connect-UUIE and a releaseComplete-UUIE.

## ITU H450.1-BASED ITU H.323 SCP METHOD AND APPARATUS

### ABSTRACT

5 A method for providing advanced intelligent network (AIN) supplementary services between an ITU H.323 endpoint and a service control point (SCP) having service logic programs (SLPs) and transaction capabilities applications part (TCAP) protocol support is described. The method preferably includes providing an ITU H.450 interface in the SCP, the ITU H.450 interface being capable of communicating with the ITU H.323 endpoint, and utilizing an ITU H.225 FACILITY message and an ITU H.450  
10 application protocol data unit (APDU) to carry one or more of call-related information, operation codes and AIN messages between the ITU H.323 endpoint and the SCP. In a case in which the AIN supplementary services are not related to an existing ITU H.323 call, the ITU H.225 FACILITY message is empty. Alternatively, in a case in which the AIN supplementary services are related to an existing ITU H.323 call, the ITU H.225  
15 FACILITY message is one of a variety of user-to-user information elements (UUIEs). The invented apparatus for supporting advanced intelligent network (AIN) supplementary services in a voice frame network preferably includes an ITU H.450.1 interface to a service control point (SCP), the SCP having also a transaction capabilities applications part (TCAP) interface to the public switched telephone network (PSTN), the  
20 SCP providing AIN supplementary services in a network environment compatible with an ITU H.323 endpoint, and an ITU H.323 endpoint interface for coupling to the ITU H.450 interface over the voice frame network, the ITU H.323 endpoint interface supporting an ITU H.450-based communications protocol.





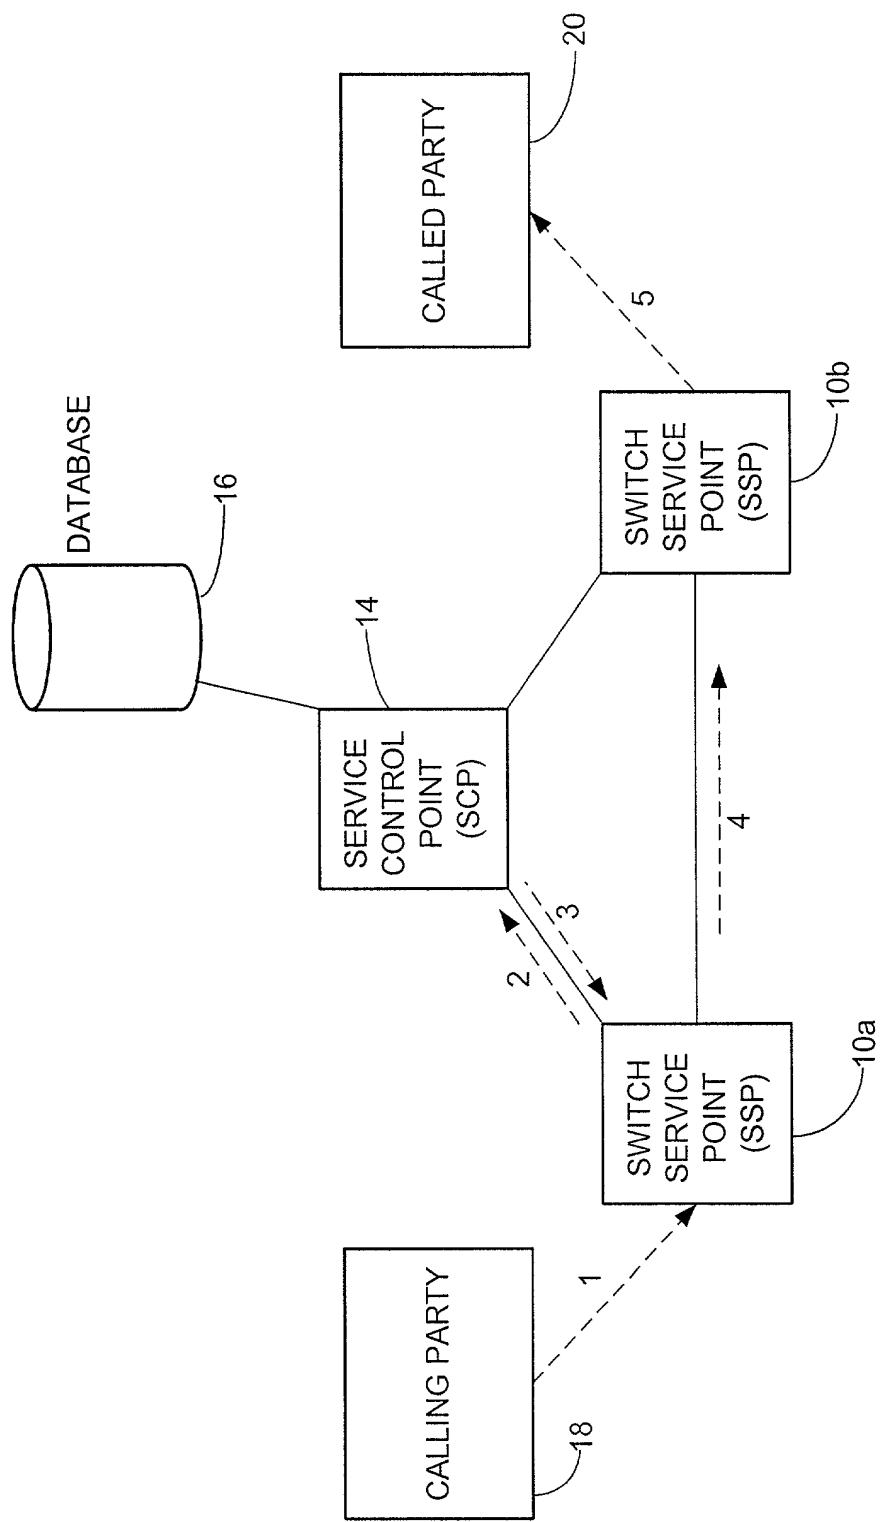
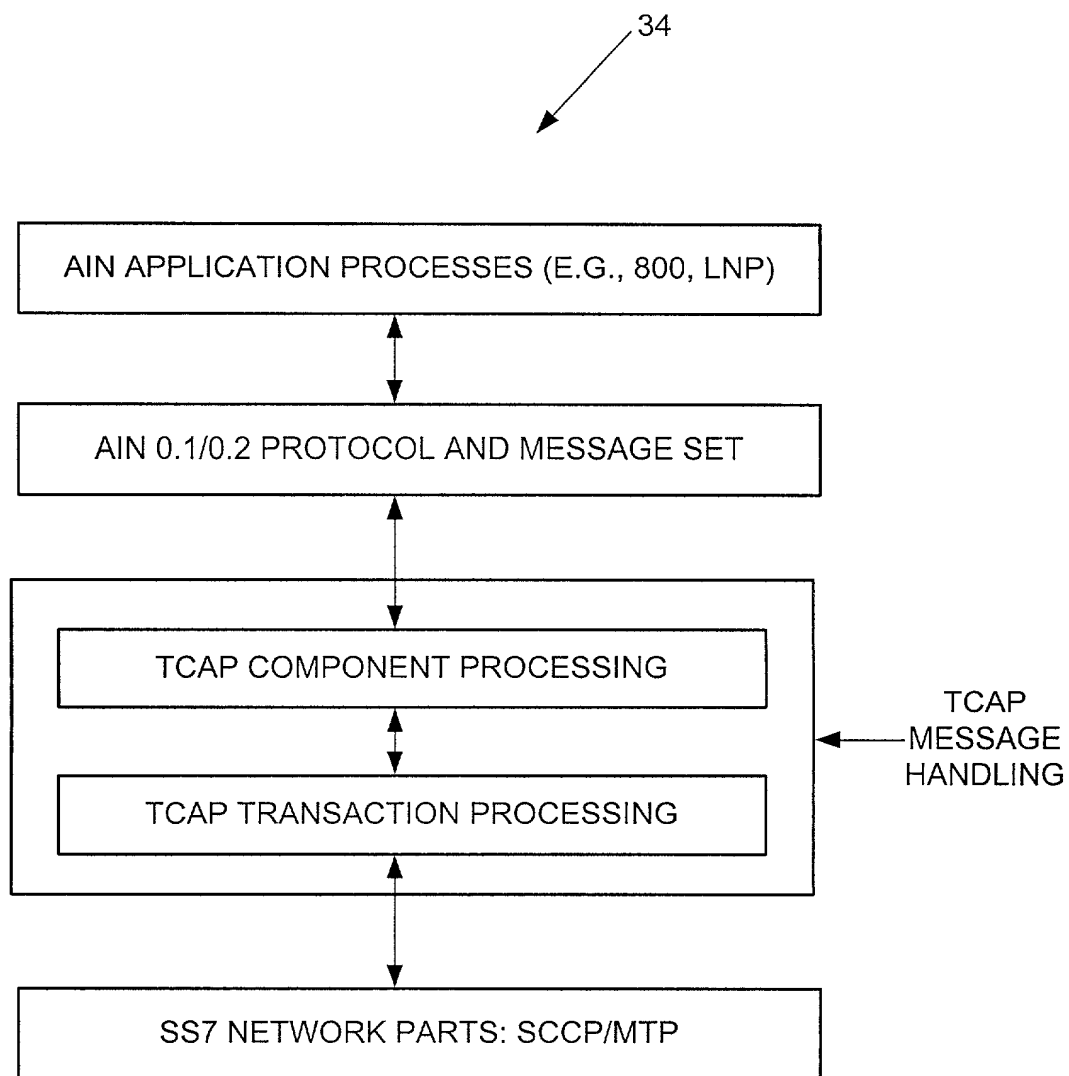
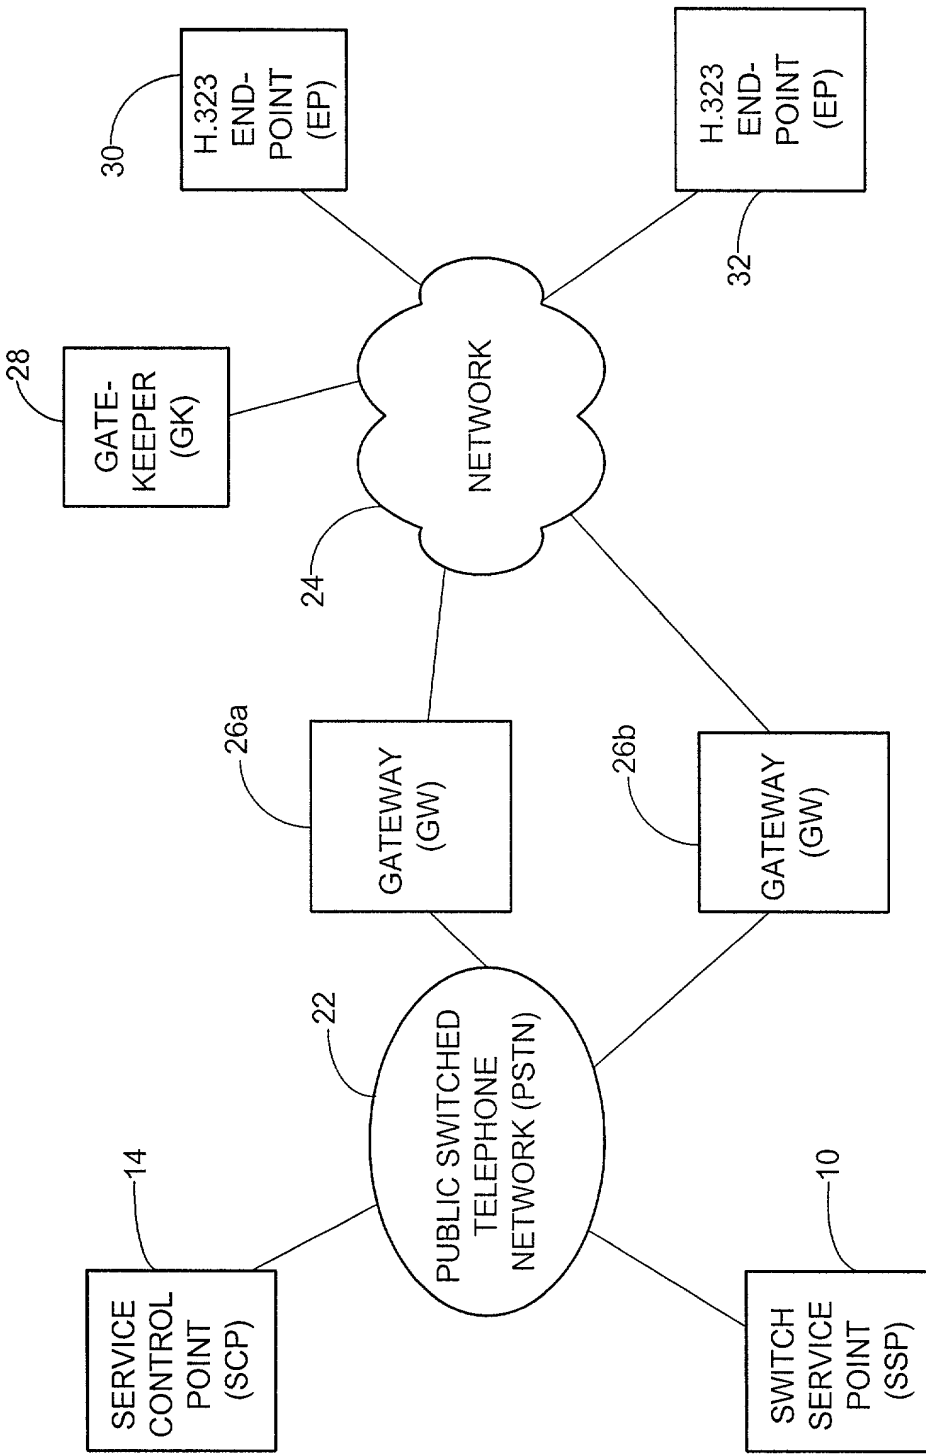
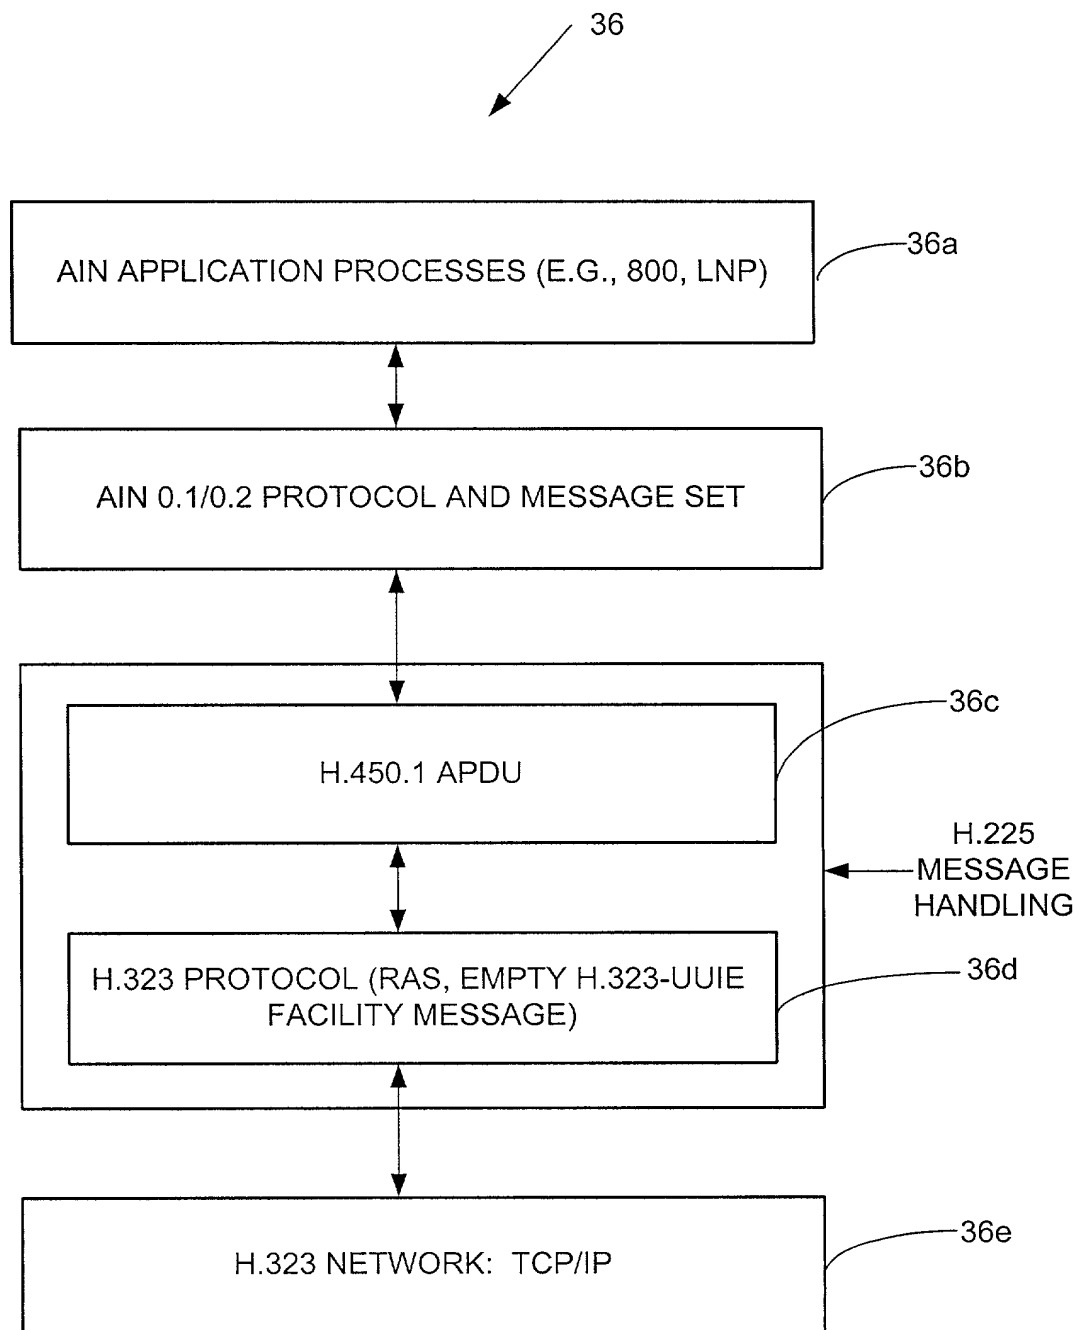


FIG. 2 (PRIOR ART)





**FIG. 4**



**FIG. 5**

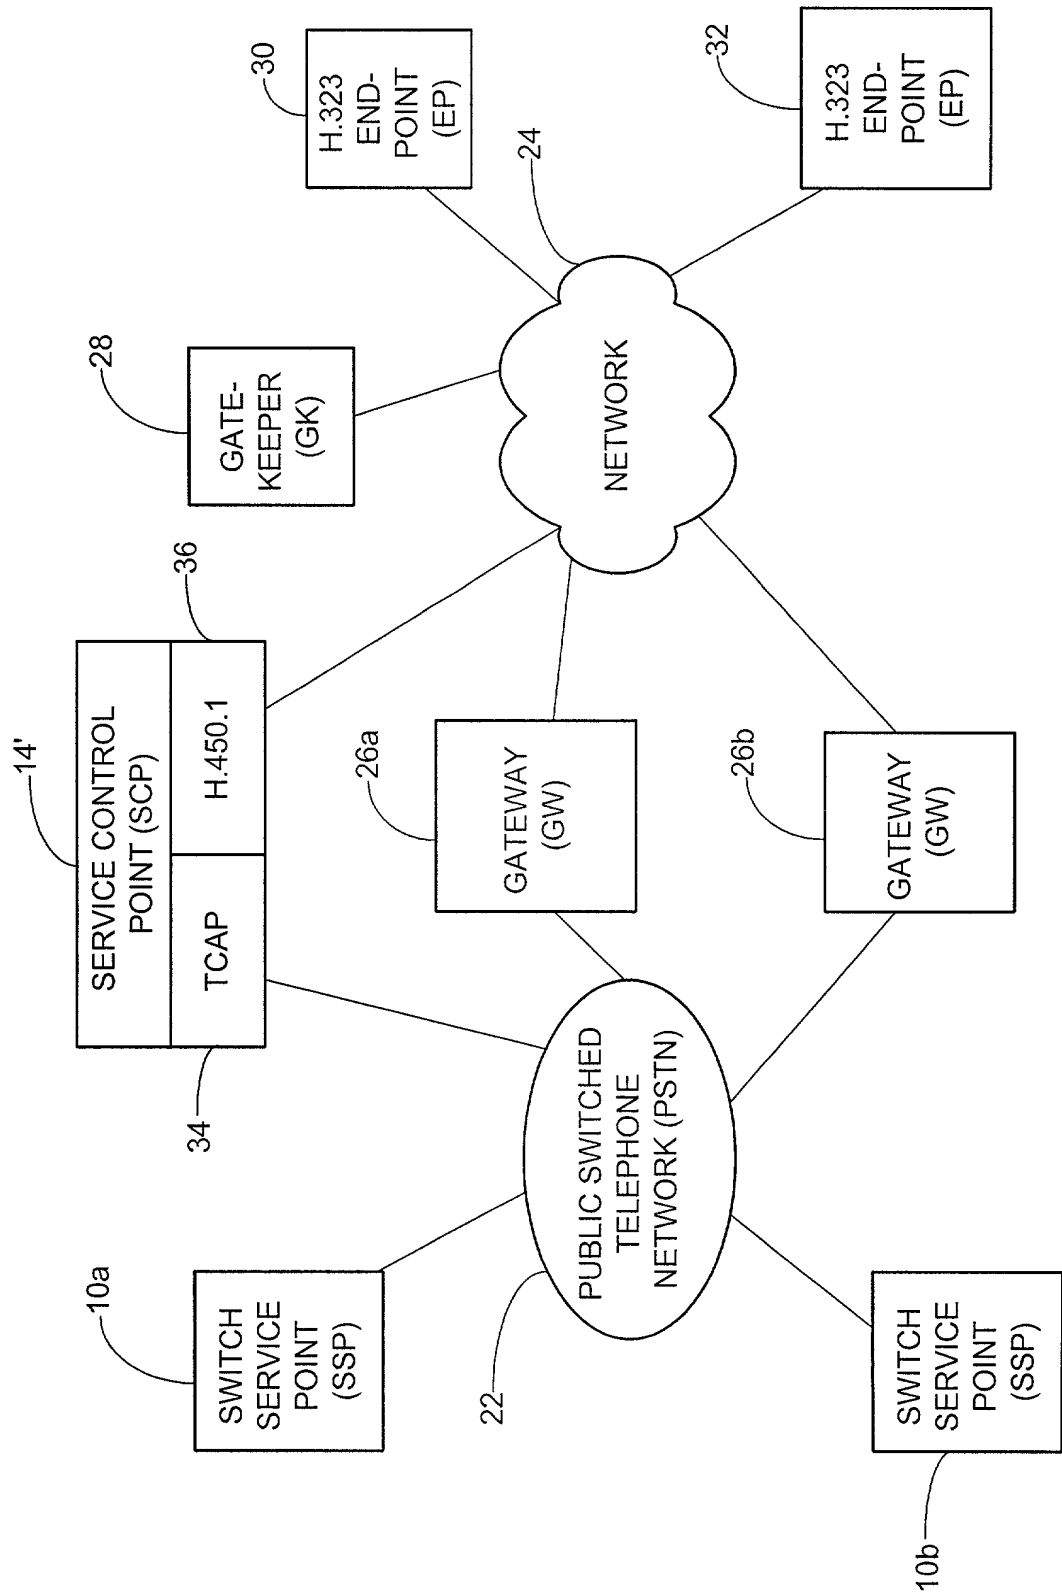


FIG. 6

COMBINED DECLARATION AND POWER OF ATTORNEY  
FOR PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled ITU H450.1-BASED ITU H.323 SCP METHOD AND APPARATUS, the specification of which:

- ☐ is attached hereto.
- ☐ was filed on \_\_\_\_\_ as Application No. \_\_\_\_\_
- ☐ and was amended on \_\_\_\_\_ (if applicable)
- ☐ with amendments through \_\_\_\_\_ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the patentability of this application in accordance with Title 37, Code of Federal Regulations, Sec. 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Sec. 119 (a)-(d) or §365(b) of any foreign application(s) for patent or inventor's certificate, or §365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below any foreign application for patent or inventor's certificate, or of any PCT international application having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)			Claiming Priority?	
			<input type="checkbox"/>	<input type="checkbox"/>
(Number)	(Country)	(Day/Month/Year Filed)	Yes	No
_____	_____	_____	<input type="checkbox"/>	<input type="checkbox"/>

I hereby claim the benefit under Title 35, United States Code, Sec. 119(e) of any United States provisional application listed below:

<u>Provisional Application No.</u>	<u>Filing Date</u>
_____	_____

I hereby claim the benefit under Title 35, United States Code, Sec. 120 or §365(c) of any PCT international application designating the United States of America listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the

insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, Sec. 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Sec. 1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

(Application No.)                      (Filing Date)                      (Status) (patented, pending, abandoned)

I hereby appoint the following attorneys to prosecute the application, to file a corresponding international application, to prosecute and transact all business in the Patent and Trademark Office connected therewith:

Customer No. 20575

<u>Attorney Name</u>	<u>Registration No.</u>
Jerome S. Marger	26,480
Alexander C. Johnson, Jr.	29,396
Alan T. McCollom	28,881
James G. Stewart	32,496
Glenn C. Brown	34,555
Stephen S. Ford	35,139
Julie L. Reed	35,349
Gregory T. Kavounas	37,862
Scott A. Schaffer	38,610
Joseph S. Makuch	39,286
James E. Harris	40,013
Graciela G. Cowger	42,444
Ariel Rogson	43,054
Craig R. Rogers	43,888

Direct all telephone calls to James G. Stewart at (503) 222-3613 and send all correspondence to:

Marger Johnson & McCollom, P.C.  
1030 SW Morrison Street  
Portland, OR 97205

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

---



Full name of first inventor: Gene Ma

Inventor's signature: \_\_\_\_\_

\_\_\_\_\_  
(Date)

Residence:

Citizenship:

Post Office address:

Full name of second joint inventor: Henry Wang

Inventor's signature: \_\_\_\_\_

\_\_\_\_\_  
(Date)

Residence:

Citizenship:

Post Office address: